





PRP-188


Thermal Receipt Printer Quick Installation Guide

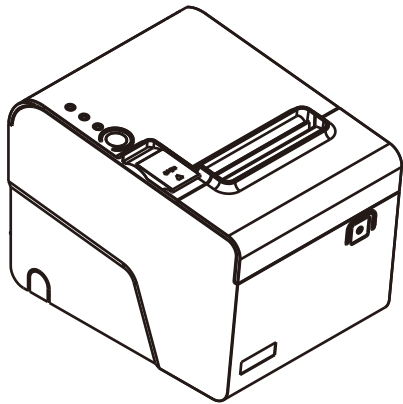

Product Overview

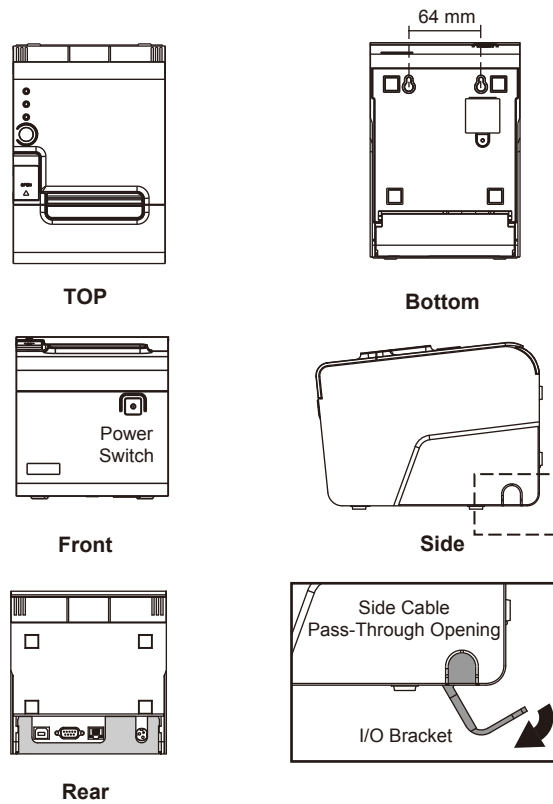

Installing your Printer

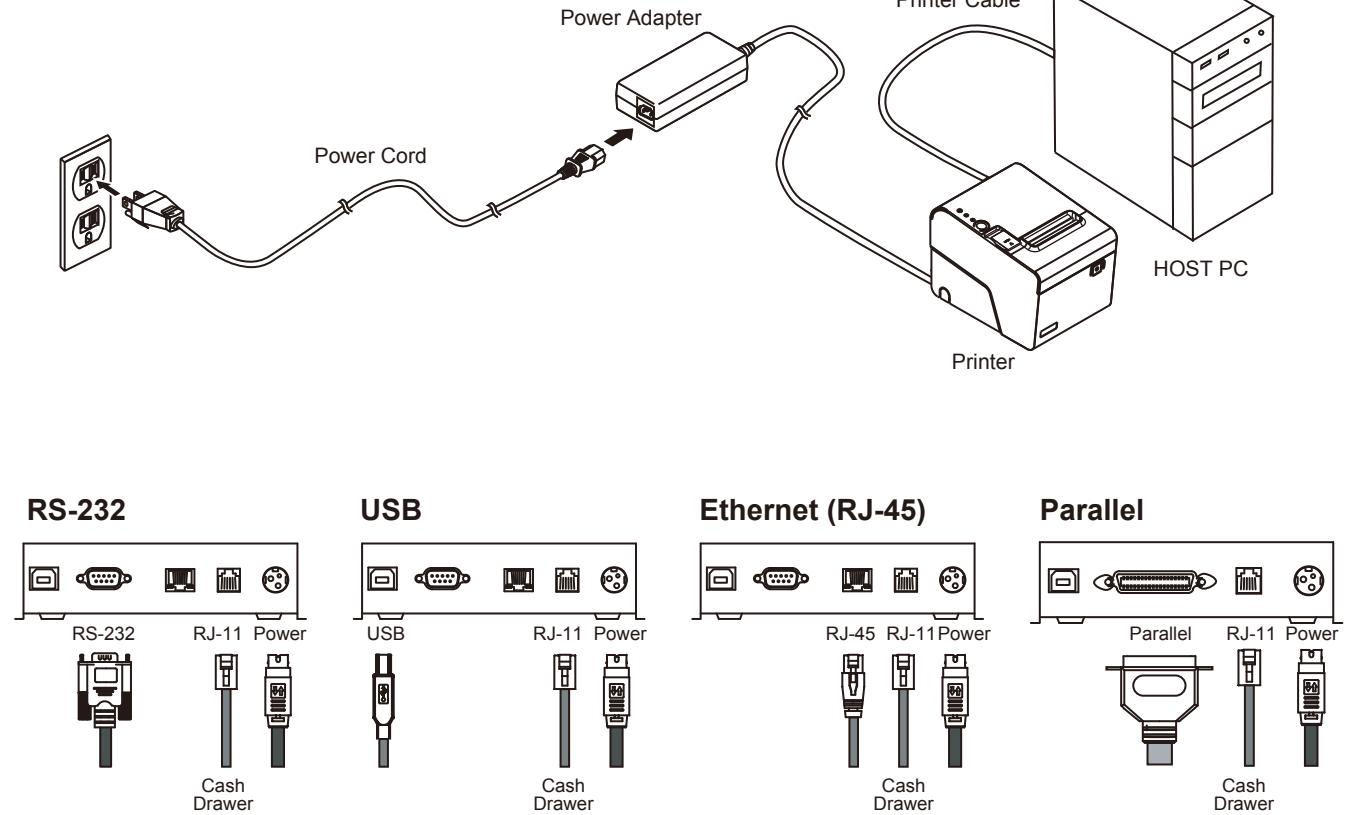


Specification

Model No.	PRP-188
Print Method	Thermal line printing
Print Speed	250mm/sec
Print Life	100 Km
Print Font	ANK Font. (ASCII Mode) Font A: 12 x 24 dots, Font B: 9 x 17 dots (Graphic Font) Chinese Character: 24 x 24 dots
Print Resolution	576 dots/line or 512 dots/line
Print Font Character Support	International Font, Big 5 Chinese, GB Chinese, Japanese, Korean selectable
Character Per Line	48 (Font A) /42(Font B)
Effective Print Width	72mm
Paper Width	79.5mm± 0.5mm
Paper Roll Diameter	≤ 83mm
Paper Thickness	0.06~0.08mm
Driver	Win 9X/Win ME/Win 2000/ Win 2003/Win NT/Win XP/ Win Vista/Win 7/Win 8, compatible with EPSON and SAMSUNG
Print Command Interface	ESC/POS print commands set
I/O Interface	Multi I/O Interface Serial +Ethernet +USB (Parallel +USB available)
Cash Drawer	DC 24V/1A, 6-Wire RJ-11
Notification Indicator	Audio and LED Indicators
Auto Cutter	Partial
Paper End Notice	Yes
Over-Heat Halt-on Protection	Yes
Others	
Power Input	24VDC/2.5A (External Adapter: 100~240VAC 50/60Hz)
Color	Red / White / Black
Compliance	FCC / CE / WEEE / RoHS
Weight	1600g (without cable)
Dimension (mm)	202(L) x 140(W) x 149(H)
Operating Temperature	0°C~45°C
Operating Humidity	10% ~ 80% RH, non-condensing
Storage Temperature	-10°C~ 60°C
Storage Humidity	10% ~ 90% RH non-condensing

* All specifications are subject to change without prior notice.

Contents

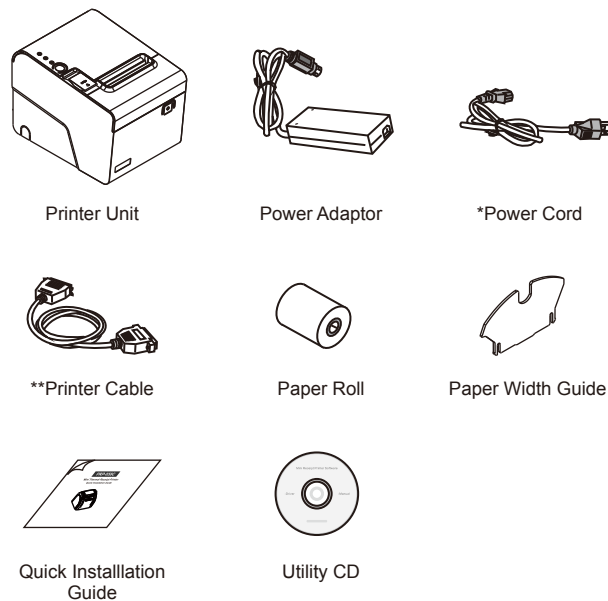


* Power Cord is selectable depending on the types of electrical plug.
** Printer cable is selectable depending on the interface required (RS-232, USB, RJ-45 or Parallel).
Please refer to the nearest local representatives for further information.


Vertical Printing Installation

You can install the printer onto a flat surface vertically and perform printing tasks. It is convenient when the space is important concerns:

1. Secure two mounting screws onto the location (e.g. wall).
2. Connect the cables to the printer.
3. Place the printer on the location with the mounting holes fitted on the screws.

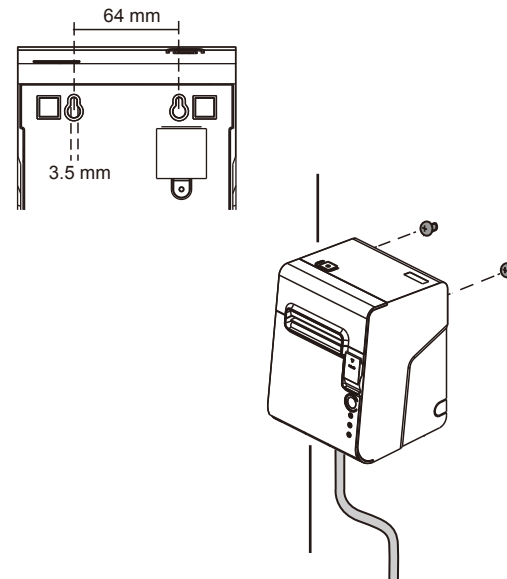

Installing the Paper Roll

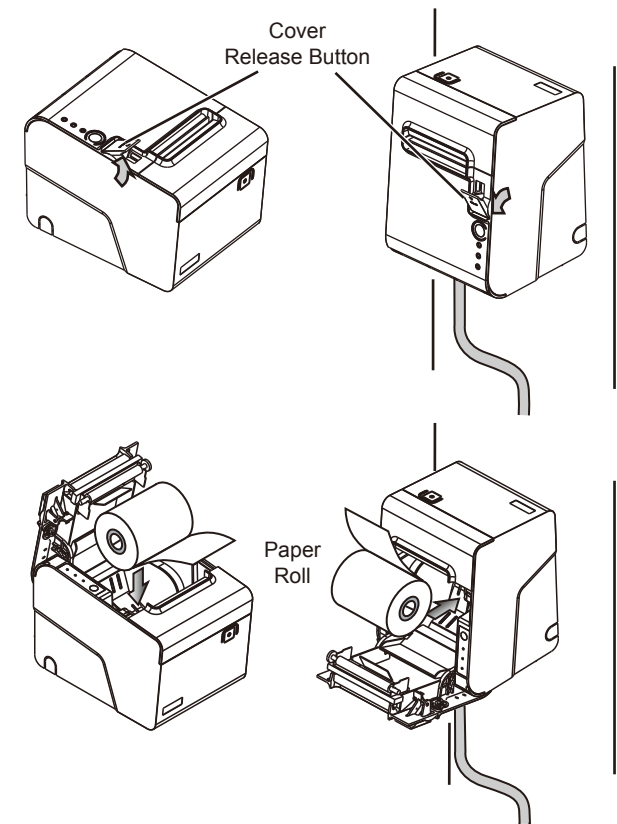


Installing the Driver of The Printer


- 1. Place the supplied Utility CD into the CD-ROM drive.
- 2. Browse the CD and double click the icon "SetupPRP.EXE".




Note:
For Windows 7 / Vista and the later version, Please Right-Click the icon and use "Run as administrator" option while installing the Driver.




- 3. Click "Install" to continue.

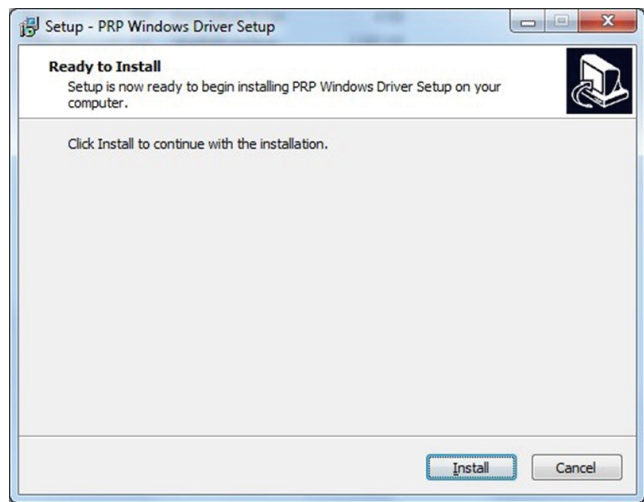


- 4. Select "Install this driver software anyway".

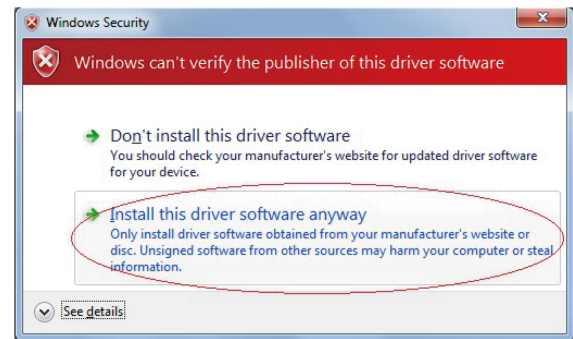

- 5. Enter printer name and select the port type (USB, Serial, TCP/IP, LPT and UTP interface). You can click the checkbox to set the printer as default printer. Click "OK" to continue.

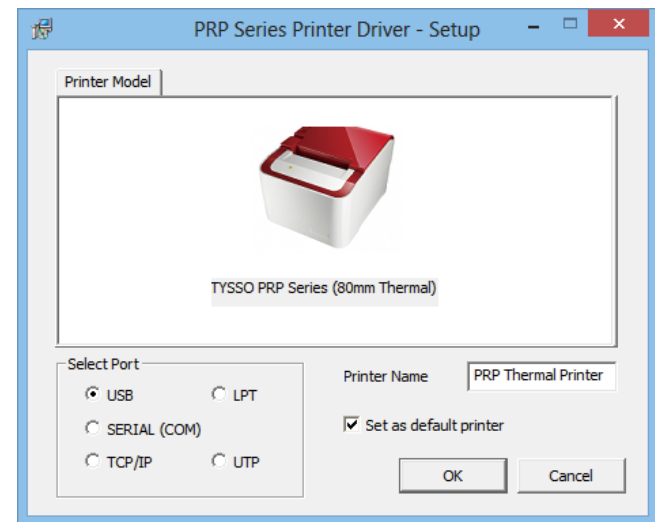


- 6. Select the proper Port available (for Serial, TCP/IP, LPT and UTP interface)

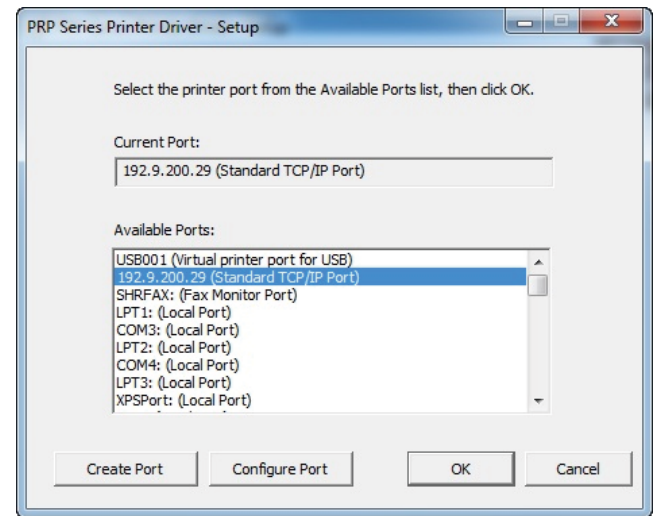


Note:
For Ethernet (TCP/IP) Interface Installation
Printing on the TCP/IP Port is only possible if both IP Address (Printer and Computer) belongs to the same class.

Please consult the IT professional before installation and refer to the instruction manual for further information.

- 6. The driver is successfully installed. Click "Finish" to exit the menu

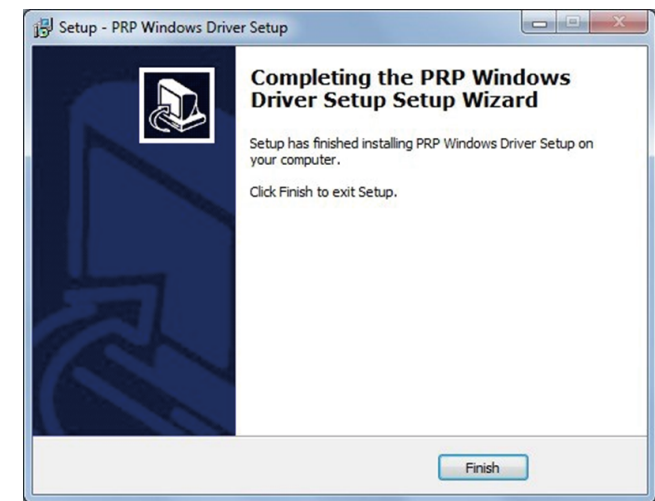


- 7. Examine the Printer
Now user can access to the "Devices and Printers" and examine the new printer.

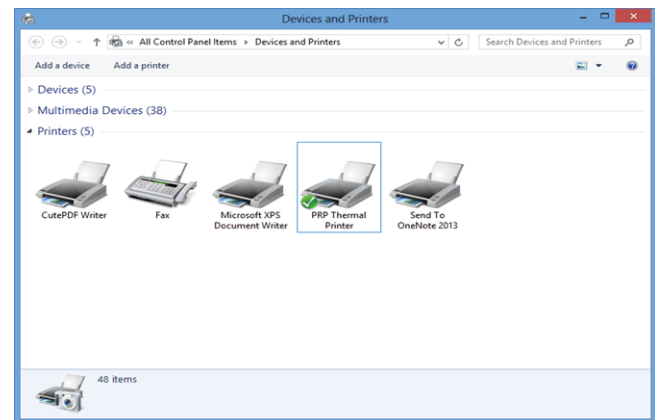

DIP Switch Configuration

To change the setting of the printer manually:

- 1. Turn off the printer.
- 2. Loosen the securing screw of the protective cover.
- 3. Remove the protective cover.
- 4. Adjust the DIP switches to configure the printer.

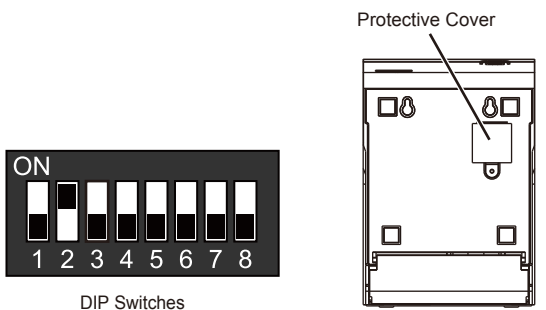

DIP	Function	ON	OFF
1	Paper Cutter	No	Yes*
2	Audio Alarm	Yes *	No
3	Print Density	Dark	Light *
4	Two-byte Character Code	No	Yes*
5	Character Per Line	42	48 *
6	Cutter with Cash Drawer	Yes	No *
7 & 8	Baud Rate Setting	---	OFF*

Baud Rate Setting

