

PRP-350

Wall Mount Bracket

Installation Guide

Part List

- Wall Mount Set x 1
- Wall Mount Screw Set x 1
(Screw x 4, Wall Plug x 4)
- Printer Securing Screw Set x 1
(M3x8 screw x 1, M3x15 screw x 1, M3x35 x 1)

I. Install the Wall Mount Bracket to the Wall


1. Open the four openings and install the wall mount plugs
2. Use the Securing Screws and install the Wall Mount Bracket on the wall.



Wall Mount Screw Set



II. Install the Bracket to the Printer Unit

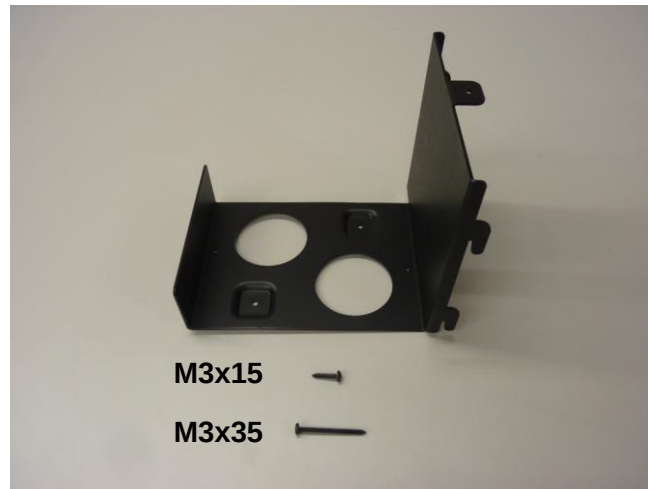

Printer Bracket and M3x15, M3x35 screws

a. Remove the Rubber Fooths and Securing Screws of Printer

1. Turn over the printer unit.
2. Remove two rubber fooths (as Red marks indicated).
3. Use a screw driver to remove the 2 Securing Screws of printer.



Remove the rubber fooths and securing screws



Rubber Fooths of Printer

b. Install the Bracket to the Printer

1. Place the metal bracket onto the bottom of printer.
2. Adjust the bracket to make the securing screw holes of bracket match to the holes of the printer (as Yellow marks indicated).
3. Use a screw driver to remove the 2 Securing Screws of printer.



Place the Printer Bracket onto the printer



Adjust the bracket to match to the correct securing screw holes of the printer



Securing the M3x35 screw.

TIPS: Adjust the Bracket Position

Adjust the bracket position so as to match the wall/bracket location.



Set the Printer/Bracket to the correct position



Securing the M3x15 screw.

c. Install Printer to the Wall

1. Install the Printer/Bracket Set to the Wall.
2. Secure the Top Securing screw of the Bracket.
3. Arrange and plug the cables printer.



Hang and make the Printer/Bracket set install to the Wall Mount Bracket



Place the Printer/Bracket Set near the Wall Mount Bracket



TOP Securing Screw of the Bracket



Printer is installed onto the Wall.